


ETAPAS DE POTENCIA

Chasis para 4 módulos de potencia

DA-4PM/OF2

Chasis con capacidad para alojar hasta cuatro módulos de potencia de las series F2 y F2DC que permite configurar etapas de 1, 2, 3 o 4 canales, con potencia por canal de 60 W a 460 W (en línea de 100 V), perfectamente adaptada a las necesidades de la obra. La facilidad para seleccionar los módulos de potencia que mejor se adapten a los altavoces de la instalación y la alta eficiencia de la clase D minimizan el consumo de energía eléctrica. Además, en el caso de utilizar fuentes de alimentación de emergencia (con la serie F2DC), el número de baterías necesarias se reduce.

Como opción, cada módulo de potencia puede incorporar un relé de seguridad de avisos y entradas de programa y prioridad con conmutación automática.

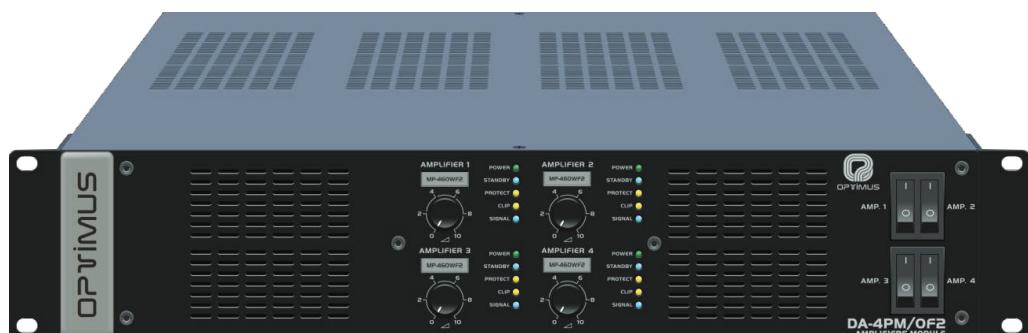

Espacios para módulos de potencia	4
Alimentación	100 ~ 240 V CA, 50 / 60 Hz (módulos F2 y F2DC) 24 V CC (sólo módulos F2DC)
Controles frontales	volumen e interruptor ON/OFF para cada módulo
Salida de supervisión de la alimentación	17 V CC (módulos F2) ó 30 V CC (módulos F2DC)
Modo de reposo	mediante contacto (activa el modo STANDBY)
Indicadores frontales	POWER, STANDBY, PROTECT, CLIP y SIGNAL
Indicadores posteriores	PRIORITY y ALARM
Entradas de audio	1 x RJ45 para cada módulo (0 dB)
Salidas de audio	1 x regleta para cada módulo (salida de 100 V)
Acabado	metal negro RAL9005
Dimensiones (mm)	482,6 x 88,6 x 430 (2 u rack)
Peso	6,5 kg (sin módulos)

RSAP-F2

Módulo opcional con relé de seguridad de avisos y entrada de programa para módulos de potencia de las series F2 y F2DC.

Módulos de potencia clase D para DP-4PM/OF2

Serie F2

100 ~ 240 V CA

MP-60WF2	60 W RMS
MP-120WF2	120 W RMS
MP-150WF2	150 W RMS
MP-250WF2	250 W RMS
MP-300WF2	300 W RMS
MP-460WF2	460 W RMS

Serie F2DC

90 ~ 240 V CA / 24 CC

MP-120WF2DC	120 W RMS
MP-150WF2DC	150 W RMS
MP-250WF2DC	250 W RMS
MP-300WF2DC	300 W RMS
MP-460WF2DC	460 W RMS


POWER AMPLIFIERS

Chassis for 4 power modules

DA-4PM/OF2

Chassis capable of housing up to four power modules of the F2 and F2DC series that allows configuring of 1, 2, 3 or 4 channel power amplifiers, with power per channel from 60 W to 460 W (on 100 V line), perfectly adapted to the needs of the work. The ease of selecting the power modules that best suit the loudspeakers in the installation and the high efficiency of class D minimize electrical energy consumption. Also, in the case of using emergency power supplies (with the F2DC series), the number of batteries required is reduced.

As an option, each power module can incorporate a security relay for messages and program and priority inputs with automatic switching.

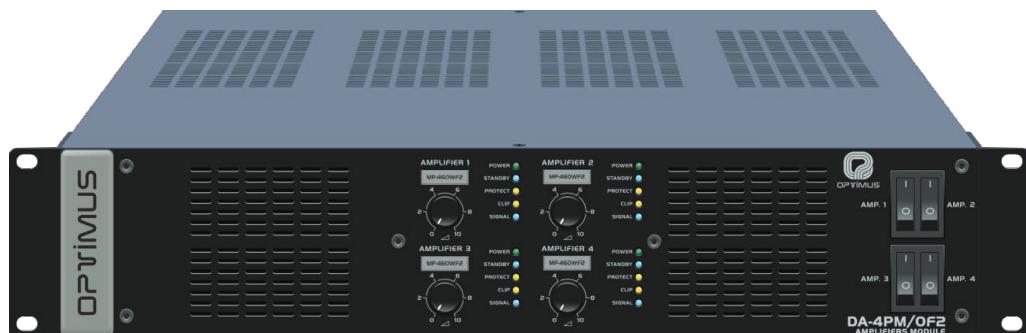

Slots for amplifier modules	4
Power supply	100 ~ 240 V AC, 50 / 60 Hz (F2 & F2DC modules) 24 V DC (only F2DC modules)
Front controls	volume & ON/OFF switch for each module
Power monitoring output	17 V DC (F2 modules) or 30 V DC (F2DC modules) by contact (activates STANDBY mode)
Standby mode	POWER, STANDBY, PROTECT, CLIP & SIGNAL
Front indicators	PRIORITY & ALARM
Rear indicators	
Audio inputs	1 x RJ45 para cada módulo (0 dB)
Audio outputs	1 x regleta para cada módulo (salida de 100 V)
Finished	black metal RAL9005
Dimensions (mm)	482.6 x 88.6 x 430 (2 u rack)
Weight	6.5 kg (without modules)

RSAP-F2

Optional module with security paging relay and program input for F2 and F2DC series amplifiers.

Class D power modules for DP-4PM/OF2

F2 series

100 ~ 240 V AC

MP-60WF2	60 W RMS
MP-120WF2	120 W RMS
MP-150WF2	150 W RMS
MP-250WF2	250 W RMS
MP-300WF2	300 W RMS
MP-460WF2	460 W RMS

F2DC series

90 ~ 240 V AC / 24 DC

MP-120WF2DC	120 W RMS
MP-150WF2DC	150 W RMS
MP-250WF2DC	250 W RMS
MP-300WF2DC	300 W RMS
MP-460WF2DC	460 W RMS