

MATRIZ DE CONMUTACIÓN DE AUDIO

UMX-2SA Tarjeta con 2 salidas de audio (1 slot)





Descripción

- Dos salidas de audio con nivel de 0dB / 600 Ohm y control de prioridad (conectores RJ45).
- Medición del estado de las líneas de altavoces y de los amplificadores.
- Salidas simétricas por transformador.
- Control de volumen independiente para cada salida.
- Control de volumen, graves y agudos controlado mediante panel frontal o equipo remoto.
- Contacto de salida para indicar avería en amplificador o línea de altavoces.



Número de salidas	2
Nivel de salida	0 dBm (775 mV)
Impedancia de salida	600 Ohm
Respuesta frecuencia(-3dB)	100 Hz a 18 KHz
Relación señal ruido	Mejor de 74 dB.
Controles (para cada salida)	Volumen. Graves: ± 10 dB at 100 Hz Agudos: ± 10 dB at 10 KHz
Alimentación	A través del chasis
Consumo	100 mA

La tarjeta UMX-2SA puede insertarse en los slots libres de la unidades COMPACT y COMPACT-E.

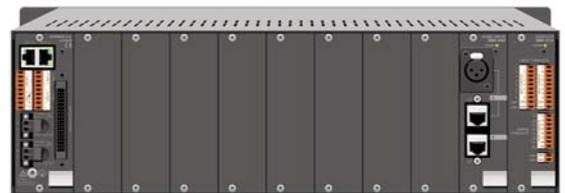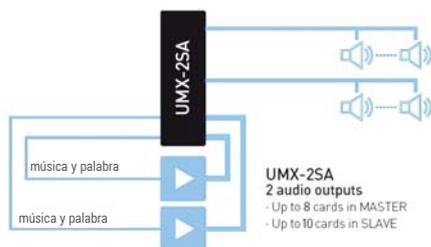

Un sistema COMPACT completo dispone de 108 slots. Con tarjetas UMX-2SA se podrían controlar, por tanto, hasta 216 zonas con control individual de los mensajes de alarma y del programa musical.

AUDIO SWITCHING MATRIX

UMX-2SA Card with 2 audio outputs (1 slot)




Description

- Two audio outputs with 0 dB sensitivity and priority control output (RJ45 connectors).
- Measure of the status of speakers line and amplifier.
- Balanced outputs by transformer.
- Independent audio level adjustment for each output.
- Volume controls, bass and treble, controlled through the Compact keyboard and/or PC.
- Output contact to indicate failure in amplifier or loudspeakers line.



Number of outputs	2
Output level	0 dBm (775 mV)
Output impedance	600 Ohm
Frequency response (-3dB)	100 Hz to 18 KHz
Signal / Noise ratio	Better than 74dB.
Controls (Independent)	Volume Bass ± 10 dB at 100 Hz Treble ± 10 dB at 10 KHz
Power supply	Through mainframe
Consumption	100 mA

The UMX-2SA card can be inserted into the free slots of the COMPACT and COMPACT-E units.

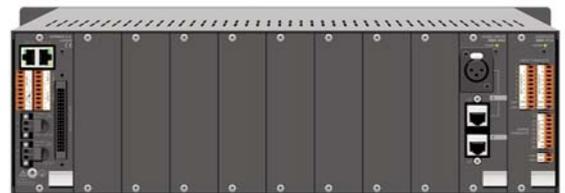

One full COMPACT system has 108 empty slots. With UMX-2SA cards is possible the individual control of alarm and music volume of up to 216 zones

