

ALTAVOZ EXPONENCIAL ATEX

AEX-25TB 25 W 124 dB

Altavoz exponencial especial para uso en atmósferas potencialmente peligrosas, con elevado grado de protección que permite instalarlo en todo tipo de entornos adversos.


Ex II2G Ex de mb IIB+H₂ T4 Gb

Potencia RMS	25 W
Selección de potencia	25, 15, 6,5, 5, 2,5 y 1,5 W
Respuesta en frecuencia	380 ~ 7.000 Hz
SPL 1 m, 1 kHz	105 dB (1 W) / 118 dB (25 W)
Temperatura de trabajo	-50° C a 50° C
Grado de protección	IP66 (IEC-529)
Acabado	poliamida, color negro
Dimensiones (mm)	207 (largo), 144 x 170 (boca)
Peso	2,2 kg
Certificación	Ex II2G Ex de mb IIB+H ₂ T4 Gb




IP66

Respuesta en frecuencia

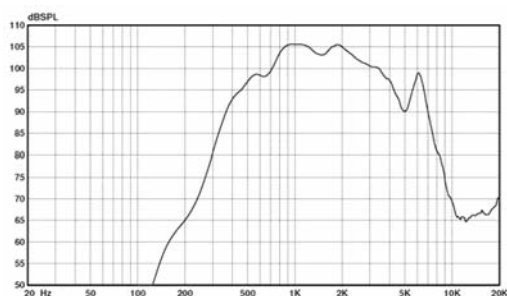

Dimensiones

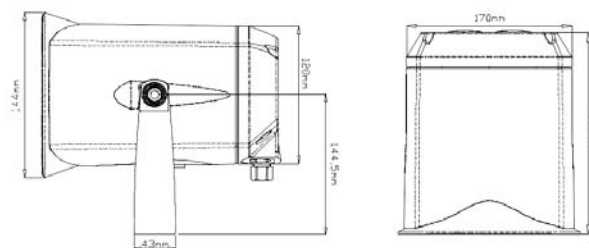

AEX25TB_ES

C/ Barcelona 101
17003 Girona (Spain)
(+34) 972 203 300

OPTIMUS
SOUND & COMMUNICATION

ATEX EXPONENTIAL LOUDSPEAKER

AEX-25TB **25 W** **124 dB**


Special exponential loudspeaker for use in potentially dangerous atmospheres, with a high degree of protection to allow them to be installed in all kinds of adverse environments.

II2G Ex de mb IIB+H₂ T4 Gb


RMS power	25 W
Power selection	25, 6.5, 5, 2.5 and 1.5 W
Frequency response	380 ~ 7,000 Hz
SPL 1 m, 1 kHz	105 dB (1 W)/118 dB (25 W)
Working temperature	-50°C to 50°C
Protection	IP66 (IEC-529)
Finish	polyamide, black
Dimensions (mm)	207 (long), 144 x 170 (mouth)
Weight	2.2 Kg
Certification	II2G Ex of mb IIB+H ₂ T4 Gb



Frequency response

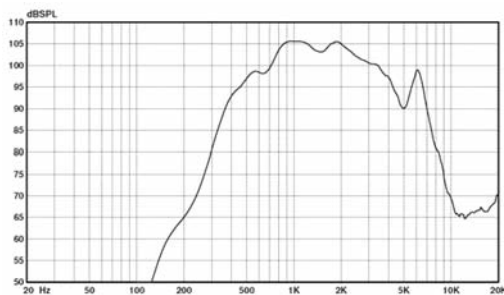

Dimensions

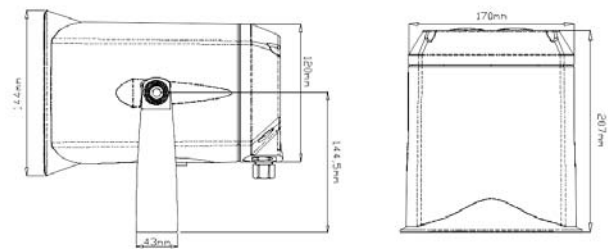

AEX25TB_EN

C/ Barcelona 101
17003 Girona (Spain)
(+34) 972 203 300

OPTIMUS
SOUND & COMMUNICATION