

## ACA-BL10SS-025

LHD Cable Accessory - Bracket "L", 100mm (3.9") (St Steel) w/ Sleeve -

### L-Bracket


---

The ACA-BL series L-brackets is designed to support linear heat cable above the risk area e.g. the top run of a cable tray. A silicon protection sleeve is supplied with the unit to protect the sensor cable when fastened to the bracket.

### Installation

---

The ACA-BL may be fitted to the cable tray and secured in place using a suitable bolt and nut at one end. The hole at the other end of the bracket allows for the securing of the sensor cable using a silicone sleeve and cable tie. The L-bracket allows support for the sensor cable at the selected distance away from the detection area.  
Recommended spacing: 1m

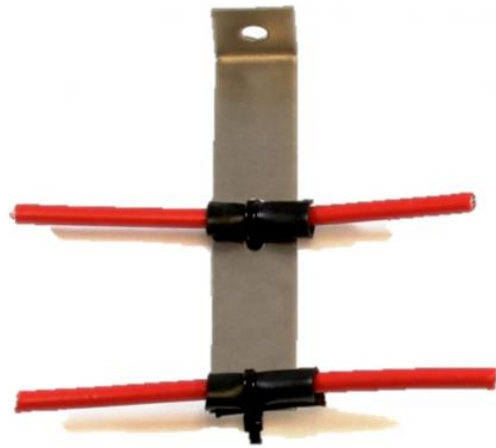

### Standard Features

---

- Easy installation of linear heat cable
- For use on cable trays
- Available in stainless steel
- Available in quantities of 25

# ACA-BL10SS-025

LHD Cable Accessory - Bracket "L", 100mm (3.9") (St Steel) w/ Sleeve -

## Specifications

### Physical

Physical dimensions	20 x 100 mm (W x L)
Net weight	410 g
Material	Stainless Steel

### Environmental

Environment	Indoor, Outdoor
-------------	-----------------

### - ACA-BL10SS-025

Dimensions (l x w)	100 x 20mm
Weight	410g
Material	Stainless Steel
Quantity	25