

ACA-BU06SS-025


LHD Cable Accessory - Bracket "U", 60mm (2.4") (St Steel) w/ Sleeve -

Channel Bracket

The ACA-BU06 series U-bracket (channel bracket) is designed to secure linear heat sensor cable to metal surfaces where there is no return edge available to fix a bracket or clip e.g. fixed roof storage tanks. A silicon protection sleeve is supplied with the unit to protect the linear heat cable when fastened to the bracket.

Installation

The ACA-BU06 should be secured in place using suitable bolts and nuts at one end. The hole in the end of the bracket allows for the securing of the sensor cable using a silicone sleeve and cable tie. The U-bracket (channel bracket) supports the sensor cable approx. 60mm away from the mounting point. Recommended spacing: 1m

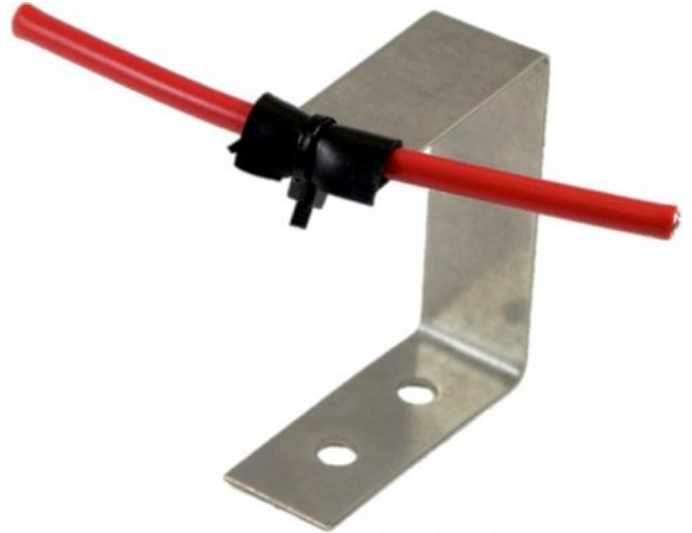

Standard Features

- Easy installation of linear heat cable
- For use on metal surfaces e.g. fixed roof storage tanks
- Available in stainless steel
- Available in quantities of 25

ACA-BU06SS-025

LHD Cable Accessory - Bracket "U", 60mm (2.4") (St Steel) w/ Sleeve -

Specifications

Physical

Physical dimensions	20 x 60 x 50 mm (W x H X D)
Net weight	850 g

Environmental

Environment	Indoor, Outdoor
-------------	-----------------

Dimensions (h x w x d)

	60 x 20 x 50 mm
--	-----------------

- ACA-BU06-025

Weight	850g
Material	Zintec
Quantity	25

- ACA-BU06-100

Weight	3.4 kg
Material	Zintec
Quantity	100

- ACA-BU06SS-025

Weight	580g
Material	Stainless Steel
Quantity	25

- ACA-BU06SS-100

Weight	2.3kg
Material	Stainless Steel
Quantity	100