


ATS1481

ATS Reader Address Configuration Card for Smart Card Readers

Product Overview

The ATS1481 reader configuration card allow for an operator to specify the reader address of smart card readers without any programming device or menu configuration. The reader address easily can be changed, by just badging at reader that needs to be changed. Instructions are at the back of the card.

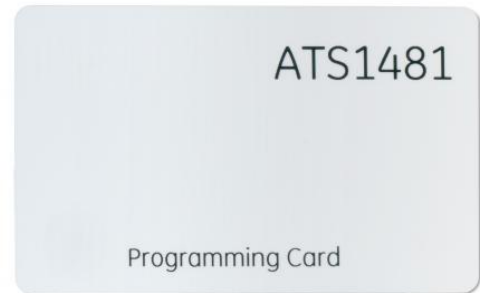

Details

- Instructions on flip side of the card

ATS1481

ATS Reader Address Configuration Card for Smart Card Readers

Technical Specifications

Technology

Credential Type	Proximity, Configuration Card
Credential Operating Frequency	125 KHz

System

Reading Distance	0 to 30 cm
Supported Readers	ATS Proximity Readers

Physical

Material	PVC
Form factor	CR80 (Credit)
Physical dimensions	86 x 54 mm
Colour	White
Card Label	Programming Card

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.