


DF432

UltraLink 32 relay output expansion module. DIN-rail mount

The I/O module (DF400) can be expanded with a 32 relay outputs card (DF432). Up to 8 expansion modules can be attached to one processor module.

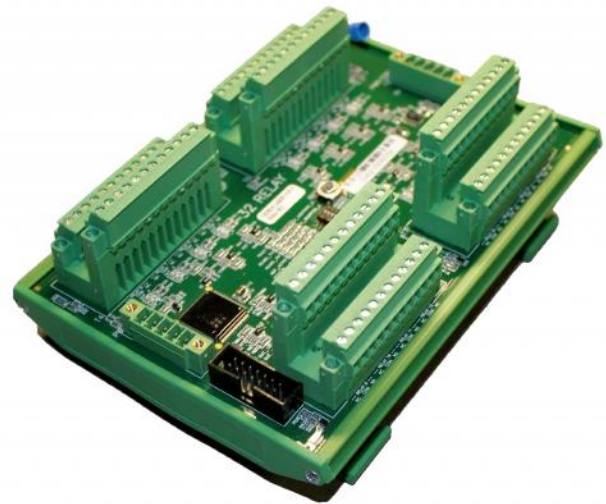

Standard Features

- 32 relay outputs
- Configurable for activation type and timing
- Activation type: latching, flash mode, pulse
- Hold/activation times programmable from 0.125 to 10 seconds

DF432

UltraLink 32 relay output expansion module. DIN-rail mount

Specifications

General	
Category	FlexZone
Product type	FlexZone Control Unit
Electrical	
Current consumption	1A
Operating voltage	30 VDC

Ordering Information

Part No.	Description
DF432	ultraLink 32 relay output expansion module. DIN-rail mount