

# DI601

Outdoor PIR 10/20/30m - 33/66/98ft selectable

## Outdoor motion sensor - quad PIR

---

DI601 Outdoor PIR Detector is an outdoor motion detector and alarm trigger that uses two independent passive infrared detectors. Both sensors must trigger to cause the detector to signal an alarm. DI601 uses quad pyro technology to deliver precise, reliable presence detection.

## Easy and quick to install

---

Programmable options include a variable pulse count and a choice of three detection ranges: 10 m / 33 ft., 20 m / 66 ft., and 30 m / 98 ft. DI601 includes jumpers that let you configure internal end-of-line (EOL) resistor values, when EOL resistors are required. Moreover, the integral dual-axis tilt sensor allows 180° of pan and 90° of tilt, which increases the speed of the outdoor installation and provides incredibly accurate aiming of the detection pattern.

## Aesthetics and hidden sensor module

---

DI601 design has a neat and professional appearance that gives no visible indication of the orientation of the detector head and totally hides the wiring.



## Standard Features

---

- Electronic range setting: 10/20/30m
- Attractive aesthetics
- 10 to 70° detection angle
- 180° pan & 90° tilt for flexible install
- Sensor module is hidden
- Built in EOL resistors
- High dust and humidity resistance (IP55)
- 5 years warranty

# DI601

Outdoor PIR 10/20/30m - 33/66/98ft selectable

## Specifications


General	
Technology	PIR
Anti masking	No
Pet immune	No
Camera	No
Detection	
Max. detection range	30 m
Detection range selection	10, 20, or 30 m
Coverage (field of view)	70°
Undercrawl protection	No
Alarm time	5 sec
Wired/wireless	
Wired-wireless	Wired
Inputs/outputs	
Alarm relay characteristic	NC / NO, Volt free relay, signal contact 24 VAC/DC @ 50 mA with an integral 25 Ohm series resistor
Relay configuration	Multiple EOL values
Electrical	
Power supply value	9 to 15 VDC
Current consumption	7 mA
Physical	
Physical dimensions	125 x 175 x 130 mm
Net weight	306 g
Shipping weight	532 g
Colour	Silver
Material	High impact ABS plastic with HDPE cover, UV stabilized
Mounting height	3 to 6 m
Environmental	
Operating temperature	-30 to +65°C
Environment	Outdoor
IP rating	IP55
Detection Area	
	Programmable: 10 m / 30 ft., 20 m / 66 ft., or 30 m / 98 ft.
Coverage	
	10 to 70° detection angle, 30 x 24 m / 98 x 79 ft. coverage max.
Adjustment	
	180° pan, 90° tilt
Fresnel lens	
	28 zones for each detection element, which can be masked with the curtain sliders
Customized optics	
	Double silicon shielded quad element eliminates 50,000 lux of white light
Outputs	
	Silent, solid state, magnetically immune.
N/O	Volt free relay, signal contact 24 VAC/DC at 50 mA with an integral 25 Ohm series resistor. Alarm time 5 seconds.
N/C	Volt free relay, signal contact 24 VAC/DC at 50 mA with an integral 25 Ohm series resistor. Alarm time 5 seconds.
Power input	
	9 to 15 VDC
Current	
	7 mA (12 V nominal)
Pulse count	
	1 or 2
Temperature compensation	
	Analogue (thermistor) and digital sensitivity adjustment
Control	

	Digital microprocessor with nonvolatile memory
Operating/storage temperature	
	-30 to +65°C / -22 to 149°F
Housing	
	High impact ABS plastic with HDPE cover, UV stabilized
Dimensions, W x H x D	
	147 x 187 x 140 mm / 5.79 x 7.36 x 5.51 in.
Weight	
	306 g net, 532 g gross / 10.79 oz net, 18.77 oz gross
LEDs	
Red	Programming LED
Blue	Detector Alarm
Infrared	Walk tester communication
Built in EOL resistors' values	
	1, 2.2, 3.3, 4.7, 5.6, and 6.8 k ohm
Mounting height	
	Variable up to 6 m / 20 ft. Optimum height 3 m / 10 ft. for full range
EN approved	
	EN 50130-5, Grade 2, Class IV
Incirt	
	approved

## Ordering Information

Part No.	Description
DI601	Outdoor PIR 10/20/30m - 33/66/98ft selectable
DI601-WT	Walk tester for DI601 and DDI602 series

## Multibeam optimum

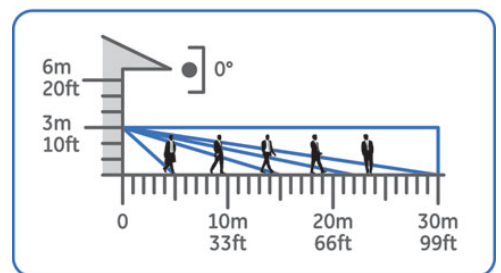

## Pet immunity

