


EST-XLOGOUT-8F

8 logical outputs card (function slot)

Overview

The logical output card has eight fully programmable relays which can be used for acknowledge the various states of the EST ENT VES outside to other systems. The channels from 1 to 4 are equipped with NC and channels from 5 to 8 with NO type of relays.

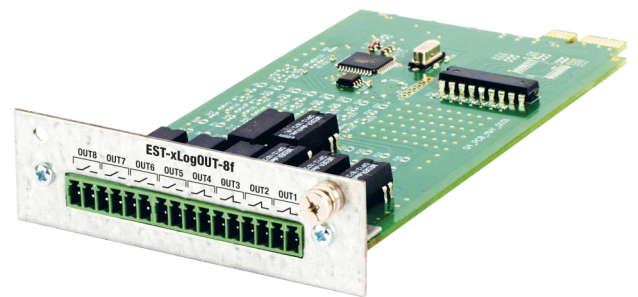

EST-XLOGOUT-8F

8 logical outputs card (function slot)

Technical specifications

Eléctrico

Consumo de corriente 10 mA at 48 V

Físico

Dimensiones físicas 70 x 160 x 25 mm (W x H x D)

Medioambiental

Temperatura de funcionamiento 0°C to +60°C

Temperatura de almacenamiento -20°C to +70°C

Estándares y regulaciones

Normativas EN54-16

Electrical

Power supply Internal from the Control Unit

Switching current 0.5 A max.

Switching voltage 48 V max.

Switching power 20 W max.

Output

Number of logic outputs 8, each

Type of outputs 4x NC; 4x NO

Connector type 16 pin screw terminal type PHOENIX, 3.5 mm

Environmental

Operating humidity 15% to 80% non-condensing

Storage humidity 5% to 95% non-condensing

Physical

Accessories Connector with screw terminals 16 pins, the distance between the partitions of 3.5 mm
