



STRIKES


► A LARGE RANGE OF STRIKES SUITABLE FOR ALL YOUR NEEDS

GUN

Universal symmetrical strike, reversible



GUNRR12

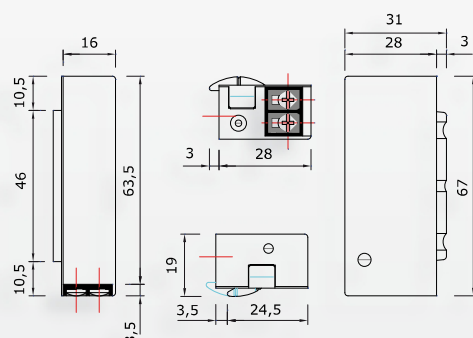

Commercial



Industrial



Public Buildings



Multi-tenant occupancy



Residential

- **Terminal block.**
- **Suitable for narrow sections.**
- **Width 16mm.**
- **Reversible.**
- **Symmetrical.**
- **Ideal for your repair work (repairs, replacements).**
- **Mortice.**
- **Adjustable jaw.**
- **Fail-secure.**
- **Faceplate options (Page 222):**
 - "T11",
 - "T290".
- **Timed relock or Door operated relocks.**
- **Built-in varistor (Electronic protection to eliminate back EMF).**

■ Dimensions (L x W x D): 67 x 16 x 28mm.
Input voltage: 12V or 24V ac/dc (according to model).


■ Consumption (ac/dc):

- 12V ac = 530mA,
- 12V dc = 620mA,
- 24V ac = 315mA,
- 24V dc = 375mA.

■ Consumption (dc), CC type (direct current):

- 12V dc = 380mA,
- 24V dc = 140mA.

Recommended power supplies



ELECTRONIC PROTECTION TO ELIMINATE BACK EMF



ADJUSTABLE JAW 4MM

RoHS

CE CE Certification

CODE	REFERENCE	DESCRIPTION
F0541000001	GUNRR12	FAIL-SECURE REVERSIBLE STRIKES TIMED RELOCK 12V AC/DC
F0541000008	GUNRR24	FAIL-SECURE REVERSIBLE STRIKES TIMED RELOCK 24V AC/DC
F0541000002	GUNRCC12	FAIL-SECURE REVERSIBLE STRIKES TIMED RELOCK 12V DC
F0541000003	GUNRCC24	FAIL-SECURE REVERSIBLE STRIKES TIMED RELOCK 24V DC
F0541000004	GUNDRR12	FAIL-SECURE REVERSIBLE STRIKES TIMED RELOCK 12V AC/DC ¹
F0541000005	GUNTRR12	FAIL-SECURE REVERSIBLE STRIKES DOOR OPERATED RELOCK 12V AC/DC ¹
F0541000006	GUNDTRR12	FAIL-SECURE REVERSIBLE STRIKES DOOR OPERATED RELOCK 12V AC/DC ²

* Refer to Limited Lifetime Warranty Conditions.
** CC Type: For unlocked door or continuous duty.

1 - Holding work
2 - Holding work
3 - Switch latch position lever
4 - Latch position switch