

# PSDCSEP series power supply unit


Power supply 12V DC for up to 8 HD cameras, adjustable for each channel



EN\*\*

CODE: **PSDCSEP08128** v.1.0/I

TYPE: **PSDCSEP 12V/8A/8x1A/TOPIC** Power supply for up to 8 HD cameras,  
adjustable for each channel.

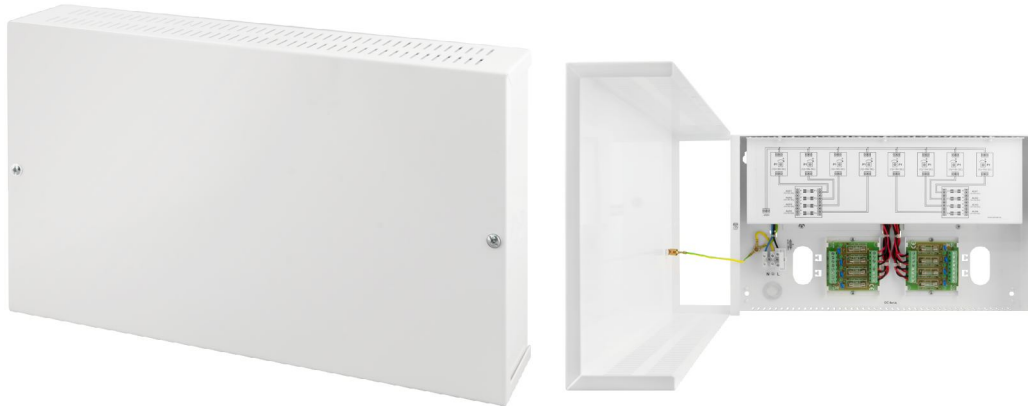

---

## Features:

- the 8x1A/12V DC power output for powering HD cameras
- output voltage adjustment 12V÷ 15VDC
- wide range of supply voltage 85÷264VAC
- 8 independent, galvanically separated outputs
- 8 outputs protected independently by 1A fuses
- high efficiency 81%
- protections:
  - SCP short-circuit protection
  - OVP over voltage protection
  - surge protection
  - OLP overload protection
- warranty – 2 year from the production date

---

## DESCRIPTION

The **PSDCSEP08128** stabilized power supply is designed to supply HD cameras or other devices requiring stabilized voltage of **12V DC**. The power supply has 8 independently adjustable channels with selectable voltages in the range **12V ÷ 15V DC / 8x1A**, thus compensating voltage drops in large CCTV installations. Power supply outputs are galvanically separated and protected by fuses. A failure (short circuit) in the output circuit will cause the fuse to blow and disconnect the circuit from DC power (+ U).

---

# PSDCSEP series power supply unit

Power supply 12V DC for up to 8 HD cameras, adjustable for each channel



SPECIFICATIONS	
Power supply	85 ÷ 264V AC
Current consumption	2A@230V AC max.
PSU power	96W max.
Efficiency	81%
Output voltage	12V DC
Output current	8x1A ( $\Sigma I = 8A$ ) max. @12V
Output voltage adjustment range	12V÷ 15V DC
Ripple voltage	120mV p-p max.
Short-circuit protection SCP	2xLB4/SEP STRIP 8x F 1A fuse TOPIK PSU MODULE 105% ÷ 150% of PSU power, electronic current limiting
Overload protection OLP	105% ÷ 150% of PSU power, electronic current limiting
Surge protection	varistors
Surge over voltage protection OVP	17,25 – 20,25V (automatic recovery)
F1÷ F8 fuses	F 1A/250V
Operating conditions	2nd environmental class, temperature: -10 °C÷40 °C, relative humidity 20%...90%, without condensation
Enclosure	Steel plate DC01 0,7mm thick, colour: RAL9003
Dimensions	365 x 220 x 70+8 (WxHxD) [mm] (+/- 2)
Net/gross weight	4,2/4,4 kg
Closing	Cheese-head screw x 2: (at the front)
Declarations, warranty	CE, RoHS, 2 year from the production date
Notes	The enclosure does not adjoin the assembly surface so that cables can be led. Convectional cooling.