

SI800M

Wireless indoor siren

For wireless intruder systems that require a strong internal audible alarm communication, the SI800M indoor siren provides the solution.

The SI800M offers reduced operating costs due to its five year battery life and low battery indication making installation and maintenance easy.

This indoor siren also benefits from the same state-of-the-art radio technology used across our wireless product range and also complies to EN50131-1 and EN50131-4 Grade 2.

To meet the varying needs of different installation environments, the SI800M offers eight different output levels plus a sweep mode. To further accommodate local requirements, the cut-off timer can be set between 1 and 240 seconds ⁽¹⁾.

Last but not least, the SI800M integrates different tones to differentiate an intrusion alarm from a smoke detection or technical default.



For more information on why Honeywell's wireless solutions are the right choice for you, please visit: www.honeywell.com/security/uk


FEATURES

- **Strong deterrent:**
The output sound level of up to 120dB ensures that any prospective intruder is clearly informed that he has been detected and make the situation stressful for him.
- **Progressive mode,**
where the sound gets louder and louder, is in case he forgets to disarm the system, the user can do it before the sound gets too loud.
- **Reduced operating costs:** By offering a 5 year battery life, the cost of replacement batteries is considerably reduced.
- **High performance**
wireless narrow band, FM radio frequency 868-870MHz band with anti-jamming.
- **Wall mounted and opening tamper proof.**
- **Compatible with**
Domonial and Le Sucre™ panels.

⁽¹⁾ When used with Domonial panels

SI800M Wireless indoor siren

SPECIFICATIONS	
SIREN OUTPUT LEVEL	120dB @ 1m
SOUND TYPE	Intrusion, Fire, technical (Beeps)
RF RANGE	>50m on site (2000m in open field)
RADIO TYPE	868 MHz, Narrow Band, FM
SIREN OUTPUT LEVEL CONTROL	Selectable from 0 to 7 plus sweep mode
CUT-OFF TIMERS	Selectable from 1s to 240s (Domonial), 180s (Le Sucre™)
BATTERY TYPE	3 x CR123
BATTERY LIFE	5 years
DIMENSION (H X W X D)	Ø165 x 70mm
SUPERVISION	Yes
LOW BATTERY SIGNALING	Yes
TAMPER	Rear and Case tamper
OPERATING TEMPERATURE	-10°C to +55°C
STORAGE TEMPERATURE	-20°C to +70°C
APPROVALS	EN50131-1, EN50131-4 Grade 2 and NF&A2P two shields (only when used with Domonial panels)

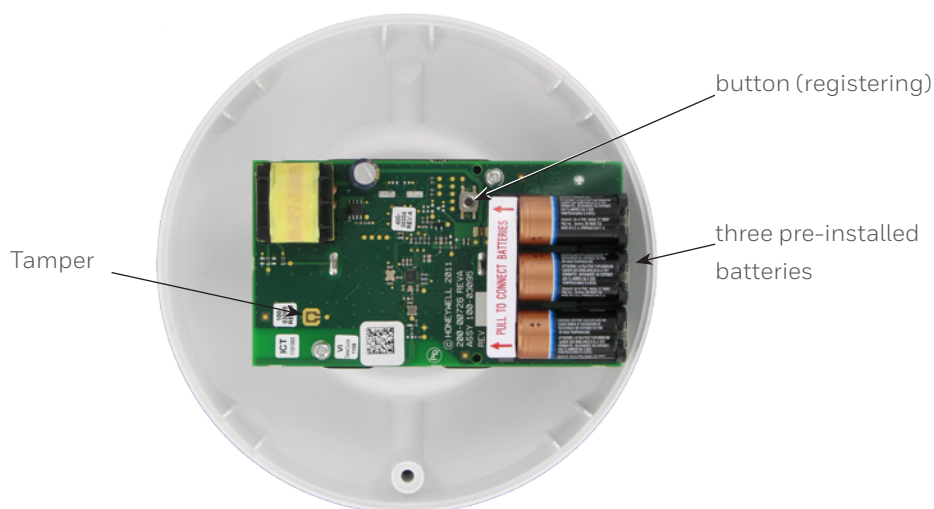

For more information

www.honeywell.com/security/uk
 Fax: +44 (0) 1698 738300
 email: securitysales@honeywell.com

ORDERING INFORMATION

SI800M	Wireless indoor siren
--------	-----------------------

Honeywell Security and Fire

Newhouse Industrial Estate
 Motherwell, Lanarkshire
 ML1 5SB, Scotland
 Tel: +44 (0) 1698 738200
www.honeywell.com

HSFI-SI800M-03-EN(0716)DS-Z
 July 2016
 © 2016 Honeywell International Inc.

Honeywell