


## DIA STRIKES

► A LARGE RANGE OF STRIKES SUITABLE FOR ALL YOUR NEEDS




### SP Symmetrical strikes monitored



SPR12

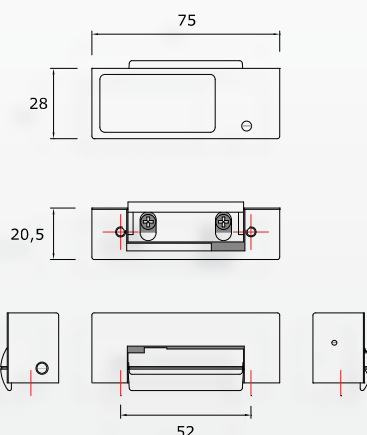

#### Recommended power supplies



- **Monitored.**
- **Terminal block.**
- **Symmetrical.**
- **Reversible.**
- **Mortice.**
- **Compact.**
- **Adjustable jaw.**
- **Fail-secure or fail-safe.**
- **Faceplate options (Page 222):**
  - "T11",
  - "T290".
- **Built-in varistor (Electronic protection to eliminate back EMF).**
- Dimensions (L x W x D): 75 x 20.5 x 28mm.
- Electric strike for doors opening to left or to right.
- Adjustable jaw (tolerance of 4mm).
- Input voltage: 12V or 24V (according to model).
- "Fail-secure" ac/dc consumption:
  - 12V ac = 540mA,
  - 12V dc = 630mA.
- "Fail-secure" consumption (dc), CC type\*\* (direct current):
  - 12V dc = 380mA.
  - 24V dc = 190mA.
- "Fail-safe" consumption (only for the SPIR version):
  - 12V dc = 200mA.
  - 24V dc = 100mA.

RoHS

WEEE

CE Certification

CODE	REFERENCE	DESCRIPTION
F0502000041	SPR12	FAIL-SECURE SYMMETRICAL STRIKE TIMED RELOCK 12V AC/DC <sup>4</sup>
F0502000044	SPR12CC	FAIL-SECURE SYMMETRICAL STRIKE TIMED RELOCK 12V DC (CONTINUOUS DUTY) <sup>4</sup>
F0502000042	SPR24CC	FAIL-SECURE SYMMETRICAL STRIKE TIMED RELOCK 24V DC (CONTINUOUS DUTY) <sup>4</sup>
F0502000040	SPIR12	FAIL-SAFE SYMMETRICAL STRIKE 12V DC <sup>4</sup>
F0502000043	SPIR24	FAIL-SAFE SYMMETRICAL STRIKE 24V DC <sup>4</sup>

\* Refer to Limited Lifetime Warranty Conditions.  
 \*\* CC Type: For unlocked door or continuous duty.

1 - Holding work  
 2 - Holding work  
 3 - Switch latch position lever  
 4 - Latch position switch