

TVM-2202

TRUVISION 22" LED, VGA, HDMI, BNC, Audio Speaker, Stereo Audio In, FULL HD, 1920X1080



Details

- 22" LED Backlight
- Full HD resolution
- 16:9 aspect ratio
- 1920 x 1080 recommended resolution
- 1,000:1 contrast ratio for crisp images
- 3D comb filter for optimal image quality
- Multiple inputs including BNC, VGA, HDMI
- BNC analog input

TVM-2202

TRUVISION 22" LED, VGA, HDMI, BNC, Audio Speaker, Stereo Audio In, FULL HD, 1920X1080

Technical Specifications

Display

| | |
|------------------------|----------------------|
| Screen Size | 21.5" |
| Aspect Ratio | 16:9 |
| Contrast Ratio | 1,000:1 |
| Viewing Angle (H/V) | 170° / 160° |
| Response Time | 5ms |
| Brightness | 250 cd/m² (typ) |
| Video Compatibility | NTSC/PAL Auto Detect |
| Recommended Resolution | 1920 x 1080 @ 60 HZ |

Audio

| | |
|---------------|----------|
| Speaker Power | 2W x 2 |
| Speakers | Built-in |

Interface

| | |
|-----------------------------|-----|
| BNC Video I/O | 1/1 |
| VGA Video In (15-pin d-sub) | Yes |
| HDMI Video In | 1 |
| RCA Audio In | 1 |
| PC Stereo In | Yes |
| Head Phone Out | No |

Operations

| | |
|------------------------|----------------------------------------------------------------------------------------------|
| Controls | Power, Up/Down, Left/Right, Source, OSD Menu |
| OSD | English, French, Spanish, German, Italian, Portuguese, Netherlands, Russian, Turkish, Polish |
| Remote Control Support | Yes |

General

| | |
|----------------------|---------------------------------------------------|
| Technology | LED |
| VESA compatibility | 100 x 100 mm |
| Filter Type | 3D Combfilter, Deinterlace |
| Accessories Included | Manual, Power Adapter, Power Cord, Remote Control |
| Panel Lamp Life | 30,000 hours |

Electrical

| | |
|-------------------|----------------|
| Power supply type | 100 to 240 VAC |
| Power consumption | <30W |

Physical


| | |
|---------------------|-----------------------|
| Physical dimensions | 542mm X 368mm X 207mm |
| Net weight | 4.0 kg |
| Shipping weight | 5.8 kg |
| Colour | Black |
| Housing Type | Plastic |

Environmental

| | |
|-----------------------|-------------|
| Operating temperature | 0 to 40°C |
| Storage temperature | -20 to 60°C |
| Relative humidity | 10 to 85% |
| Environment | Indoor |

Standards & Regulations

| | |
|------------|----|
| Compliance | CE |
|------------|----|

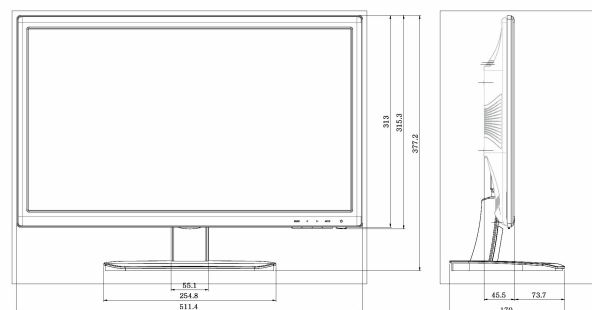

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.