



ELECTROMAGNETIC LOCKS

► A LARGE RANGE OF ELECTROMAGNETIC LOCKS SUITABLE FOR ALL YOUR NEEDS

V1SR

Narrow surface mount electromagnetic lock



Commercial



Industrial



Public Buildings




Multi-tenant occupancy



Residential

- **Thin electromagnetic lock.**
- **Holding force: 180 kg.**
- **High resistance to corrosion.**
- **Monitored: Lock status.**
- **Surface mount.**
- **Complete with armature plate.**
- **No mechanical wear.**
- **Easy installation.**
- **Recommended for indoor use.**
- **Fail safe (Door unlocked when the power is cut).**
- **No residual magnetism.**
- **Varistor supplied (Electronic protection to eliminate back EMF).**
- Dimensions (L x W x D):
 - Electromagnetic lock = 167 x 34 x 21mm.
 - Armature = 130 x 32 x 9mm.
- Optional: Electromagnetic lock accessories (P. 243).
- Input voltage: 12/24V dc.
- Consumption:
 - 12V dc = 550mA,
 - 24V dc = 225mA.

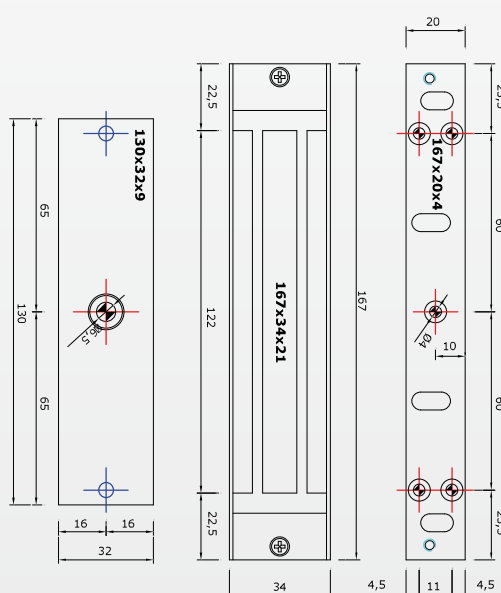

Recommended power supplies



ARD212



BS602

RoHS

WEEE

CE Certification

CODE	REFERENCE	DESCRIPTION
F0526000005	V1SR	180-KG SURFACE MOUNT NARROW ELECTROMAGNETIC LOCK 12/24V DC + MONITORED

* Refer to Limited Lifetime Warranty Conditions.